



ROOFING PRODUCTS

RELIABILITY SERVICE INNOVATION

IPS Roofing Products is an industry leader in residential and commercial roofing products. Beginning with vent pipe flashings, IPS Roofing Products has sustained a superior reputation among roofing distributors and contractors for high quality product, committed service and industry expertise. All products are tested to exceed strict code requirements and to assure quality, durability and safety.

IPS Corporation has long been recognized for its commitment to improving residential and commercial construction products. From introducing America's first plastic pipe solvent cement, the first plastic recessed washing machine outlet box, to the first adjustable multi-size roof vent flashing, IPS Corporation has always sought to help professional contractors work faster and smarter.


LIMITED LIFETIME WARRANTY

Roof Flashings & Rain Collars

All IPS Roofing Products roof flashings and rain collars are guaranteed to last for the life of the roof. Because IPS Roofing Products are made with high-quality UV and weather resistant materials, they are warranted for the lifetime of the roof on which they are installed.

See the back cover of the catalog for the full IPS Roofing Products warranty statement.

Thank you for choosing IPS Roofing Products!



MULTI-SIZE ROOFING PRODUCTS

MULTI-SIZE ALUMINUM BASE ROOF FLASHINGS



- 25 mil aluminum base with elastomer collar
- Fits any roof pitch to 45° (1 ½" and 2" vent pipe allow for a pitch range beyond 45°)
- Tested for ultraviolet, ozone and weather resistance
- Approved for type "B" installations
- Elastomer collar heat tested to 180°F
- Multi-size flashings fits 1 ¼" – 3" and 3" – 4" vent pipe
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81715	3 N 1" 10 ¾" x 14 ½" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	AB31	012181-817155	1.780	20	13
81718	3 N 1" 18" x 18" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	AB3118	012181-817186	2.590	15	17
81717	12" x 16" Base for 3" or 4" Vent Pipe	AB34	012181-817179	1.660	20	15
81719	18" x 18" Base for 3" or 4" Vent Pipe	AB3418	012181-817193	2.590	15	17

MULTI-SIZE HARD PLASTIC BASE ROOF FLASHINGS



- Thermoplastic hard base with elastomer collar
- Fits any roof pitch to 45° (1 ½" and 2" vent pipe allow for a pitch range beyond 45°)
- Tested for ultraviolet, ozone and weather resistance
- Approved for type "B" installations
- Elastomer collar heat tested to 180°F
- Multi-size flashing fits 1 ¼" – 3" and 3" – 4" vent pipe
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81700	3 N 1" 11 ⅞" x 15" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	HB31	012181-817001	1.080	20	11
81702	12" x 15 ½" Base for 3" or 4" Vent Pipe	HB34	012181-817025	1.080	20	13

MULTI-SIZE ALL FLEXIBLE ROOF FLASHINGS



- All flexible, one-piece base and collar
- Fits any roof pitch to 45° (1 ½" and 2" vent pipe allow for a pitch range beyond 45°)
- Tested for ultraviolet, ozone and weather resistance
- Approved for type "B" installations
- Elastomer collar heat tested to 180°F
- Multi-size flashing fits 1 ¼" – 3" and 3" – 4" vent pipe
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81705	3 N 1" 10" x 13 ¼" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	FB31	012181-817056	0.460	20	13
81707	12" x 14 ¾" Base for 3" or 4" Vent Pipe	FB34	012181-817070	0.750	20	19

MULTI-SIZE GALVANIZED STEEL BASE ROOF FLASHINGS



- 24-gauge galvanized base
- Fits any roof pitch to 45° (1 ½" and 2" vent pipe allow for a pitch range beyond 45°)
- Tested for ultraviolet, ozone and weather resistance
- Approved for type "B" installations
- Elastomer collar heat tested to 180°F
- Multi-size flashing fits 1 ¼" – 3" and 3" – 4" vent pipe
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81710	3 N 1" 10 ¾" x 14 ½" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	GB31	012181-817100	1.780	20	27
81713	3 N 1" 18" x 18" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	GB3118	012181-817131	2.590	15	32
81712	12" x 16" Base for 3" or 4" Vent Pipe	GB34	012181-817124	1.660	20	29
81714	18" x 18" Base for 3" or 4" Vent Pipe	GB3418	012181-817148	2.590	15	34
GALVANIZED BENT EDGE FLASHING						
81723	3 N 1" 18" x 18" Base for 1 ¼"/ 1 ½", 2" or 3" Vent Pipe	GB3118BE	012181-817230	2.590	10	22
81724	18" x 18" Base for 3" or 4" Vent Pipe	GB3418BE	012181-817247	2.590	10	23

Custom colored flashings available, call customer service for availability.

Caution: Do not use Petroleum base mastics, sealing compounds or paints on collar portion of all flashings, on all hardbase, flexible or rain collars.

CUSTOM MULTI-SIZE COPPER BASE ROOF FLASHINGS



- 16 ounce copper base with elastomer collar
- Fits any roof pitch to 45° (1 ½" and 2" vent pipe allow for a pitch range beyond 45°)
- Tested for ultraviolet, ozone and weather resistance
- Approved for type "B" installations
- Elastomer collar heat tested to 180°F
- Multi-size flashings fit 1 ¼" – 3" and 3" – 4" vent pipe
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS./CASE
81940 	3 N 1" 10 3/4" x 14 1/2" Base for 1 1/4", 1 1/2", 2" or 3" Vent Pipe	CB31	012181-819400	0.847	5	11
81941 	12" x 16" Base for 3" or 4" Vent Pipe	CB34	012181-819415	0.915	5	10



CUSTOM FINISH MULTI-SIZE GALVANIZED BASE ROOF FLASHINGS



- 24 guage galvanized steel base with elastomer collar
- Fits any roof pitch to 45° (1 ½" and 2" vent pipe allow for a pitch range beyond 45°)
- Tested for ultraviolet, ozone and weather resistance
- Approved for type "B" installations
- Elastomer collar heat tested to 180°F
- Multi-size flashings fit 1 ¼" – 3" and 3" – 4" vent pipe
- Limited Lifetime Warranty for the life of the current roof system

AVAILABLE FINISHES

- Brown
- Black
- Weathered Gray

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81851	3 N 1 [®] Brown 10 ¾" x 14 ½" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	GB31BROWN	012181-818510	1.599	20	30
81852	3 N 1 [®] Black 10 ¾" x 14 ½" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	GB31BLACK	012181-818527	1.599	20	30
81853	3 N 1 [®] Gray 10 ¾" x 14 ½" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	GB31GRAY	012181-818534	1.599	20	30
81856	Brown 12" x 16" Base for 3" or 4" Vent Pipe	GB34BROWN	012181-818565	1.660	20	30
81857	Black 12" x 16" Base for 3" or 4" Vent Pipe	GB34BLACK	012181-818572	1.660	20	30
81858	Gray 12" x 16" Base for 3" or 4" Vent Pipe	GB34GRAY	012181-818589	1.660	20	30

CUSTOM FINISH MULTI-SIZE ALUMINUM BASE ROOF FLASHINGS



- 25 mil. aluminum base with elastomer collar
- Fits any roof pitch to 45°
- Tested for ultraviolet, ozone and weather resistance
- Approved for type "B" installations
- Elastomer collar heat tested to 180°F
- Multi-size flashings fit 1 ¼" – 3" and 3" – 4" vent pipe
- Limited Lifetime Warranty for the life of the current roof system

AVAILABLE FINISHES

- Brown
- Black
- Weathered Gray

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81901	3 N 1 [®] Brown 10 ¾" x 14 ½" Base for 1 ¼", 1 ½", 2", or 3" Vent Pipe	AB31BROWN	012181-819012	1.599	20	13
81902	3 N 1 [®] Black 10 ¾" x 14 ½" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	AB31BLACK	012181-819029	1.599	20	13
81903	3 N 1 [®] Gray 10 ¾" x 14 ½" Base for 1 ¼", 1 ½", 2" or 3" Vent Pipe	AB31GRAY	012181-819036	1.599	20	13
81906	Brown 12" x 16" Base for 3" or 4" Vent Pipe	AB34BROWN	012181-819067	1.660	20	15
81907	Black 12" x 16" Base for 3" or 4" Vent Pipe	AB34BLACK	012181-819074	1.660	20	15
81908	Gray 12" x 16" Base for 3" or 4" Vent Pipe	AB34GRAY	012181-819081	1.660	20	15

Custom colored flashings available, call customer service for availability.

Caution: Do not use Petroleum base mastics, sealing compounds or paints on collar portion of all flashings, on all hardbase, flexible or rain collars.

STANDARD ALUMINUM BASE ROOF FLASHINGS



- 25 mil. aluminum base with elastomer collar
- Fits any roof pitch to 45°
- Tested for ultraviolet, ozone and weather resistance
- Approved for type "B" installations
- Elastomer collar heat tested to 180°F
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81900	8 ¾" x 12 ½" Base for 1 ¼" or 1 ½" Vent Pipe	AB1	012181-819005	1.270	20	9
81905	8 ¾" x 12 ½" Base for 2" Vent Pipe	AB2	012181-819050	1.270	20	9
81910	10 ¾" x 14 ½" Base for 3" Vent Pipe	AB3	012181-819104	1.780	20	13
81915	12" x 16" Base for 4" Vent Pipe	AB4	012181-819159	1.660	20	14
81916	8 ¾" x 12 ½" Base for ½", ¾" and 1" Tubing	AB5	012181-819166	1.270	20	20
18"x18"						
81920	18" x 18" Base for 1 ¼" or 1 ½" Vent Pipe	AB118	012181-819203	2.590	15	16
81925	18" x 18" Base for 2" Vent Pipe	AB218	012181-819258	2.590	15	17
81930	18" x 18" Base for 3" Vent Pipe	AB318	012181-819302	2.590	15	17
81935	18" x 18" Base for 4" Vent Pipe	AB418	012181-819357	2.560	15	16
81937	18" x 18" Base for ½", ¾" or 1" Tubing	AB518	012181-819370	2.590	15	46

STANDARD ALL FLEXIBLE ROOF FLASHINGS



- All flexible, one-piece base and collar
- Fits any roof pitch to 45°
- Tested for ultraviolet, ozone and weather resistance
- Approved for type "B" installations
- Elastomer collar heat tested to 180°F
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81800	9" x 11 ¾" Base for 1 ¼" or 1 ½" Vent Pipe	FB1	012181-818008	0.300	20	11
81805	9" x 11 ¾" Base for 2" Vent Pipe	FB2	012181-818053	0.300	20	10
81810	10" x 13 ¼" Base for 3" Vent Pipe	FB3	012181-818101	0.460	20	13
81815	12" x 14 ¾" Base for 4" Vent Pipe	FB4	012181-818152	0.750	20	19

Custom colored flashings available, call customer service for availability.

Caution: Do not use Petroleum base mastics, sealing compounds or paints on collar portion of all flashings, on all hardbase, flexible or rain collars.

STANDARD HARD PLASTIC BASE ROOF FLASHINGS



- Thermoplastic hard base with elastomer collar
- Fits any roof pitch to 45°
- Tested for ultraviolet, ozone and weather resistance
- Approved for type “B” installations
- Elastomer collar heat tested to 180°F
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81750	9 ¼" x 13" Base for 1 ¼" or 1 ½" Vent Pipe	HB1	012181-817506	1.380	20	8
81751	11 ⅝" x 15" Base for 1 ¼" or 1 ½" Vent Pipe	HB1LB	012181-817513	1.080	20	12
81755	9 ¼" x 13" Base for 2" Vent Pipe	HB2	012181-817551	1.380	20	8
81756	11 ⅝" x 15" Base for 2" Vent Pipe	HB2LB	012181-817568	1.080	20	12
81760	11 ⅝" x 15" Base for 3" Vent Pipe	HB3	012181-817605	1.080	20	11
81765	12" x 15 ½" Base for 4" Vent Pipe	HB4	012181-817650	1.080	20	13
18"x18"						
81931	18" x 18" Base for 1 ¼" or 1 ½" Vent Pipe	HB118	012181-819319	1.430	10	11
81932	18" x 18" Base for 2" Vent Pipe	HB218	012181-819326	1.430	10	11
81933	18" x 18" Base for 3" Vent Pipe	HB318	012181-819333	1.430	10	11

STANDARD GALVANIZED STEEL BASE ROOF FLASHINGS



- 24-gauge galvanized base with elastomer collar
- Fits any roof pitch to 45°
- Tested for ultraviolet, ozone and weather resistance
- Approved for type “B” installations
- Elastomer collar heat tested to 180°F
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81850	8-¾" x 12-½" Base for 1-¼" or 1-½" Vent Pipe	GB1	012181-818503	1.270	20	19
81855	8-¾" x 12-½" Base for 2" Vent Pipe	GB2	012181-818558	1.270	20	18
81860	10-¾" x 14-½" Base for 3" Vent Pipe	GB3	012181-818602	1.780	20	26
81865	12" x 16" Base for 4" Vent Pipe	GB4	012181-818657	1.660	20	29
81870	8-¾" x 12-½" Base for ½", ¾" or 1" Tubing	GB5	012181-818701	1.270	20	26
18"x18"						
81872	18" x 18" Base for 1 ¼" or 1 ½" Vent Pipe	GB118	012181-818725	2.590	15	34
81874	18" x 18" Base for 2" Vent Pipe	GB218	012181-818749	2.590	15	34
81876	18" x 18" Base for 3" Vent Pipe	GB318	012181-818763	2.590	15	35
81878	18" x 18" Base for 4" Vent Pipe	GB418	012181-818787	2.590	15	35
81879	18" x 18" Base for ½", ¾" or 1" Tubing	GB518	012181-818794	2.590	15	34

MULTI-SIZE METAL ROOF PIPE FLASHINGS



- Each flashing is adjustable to fit several pipe diameters – eight models to fit ¼" through 13" pipe sizes
- Made of long life, flexible, weatherproof EPDM rubber
- Flexible, corrosion-resistant aluminum base ring conforms to any roof panel configuration
- One-piece construction for easy installation
- 20-year warranty
- Clearly marked pipe diameters ensure a tight accurate fit
- Pleated cone adjusts to any roof pitch
- Continuous service temperature range of -65°F to 250°F
- Made in the USA

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81820	¼" – 2 ½" EPDM Roof Flashing, 4 ¾" Base Diameter	81820	012181-818206	0.128	10	2
81821	1 ¾" – 3" EPDM Roof Flashing, 6 ¼" Base Diameter	81821	012181-818213	0.222	10	4
81822	¼" – 5" EPDM Roof Flashing, 7 ¾" Base Diameter	81822	012181-818220	0.266	10	5
81823	3" – 6 ¼" EPDM Roof Flashing, 9 ¼" Base Diameter	81823	012181-818237	0.456	10	9
81824	4 ¼" – 7 ¾" EPDM Roof Flashing, 10 ¾" Base Diameter	81824	012181-818244	0.640	5	5
81825	5" – 9" EPDM Roof Flashing, 12 ½" Base Diameter	81825	012181-818251	1.002	5	9
81826	6" – 11" EPDM Roof Flashing, 14 ½" Base Diameter	81826	012181-818268	1.374	5	11
81827	7" – 13" EPDM Roof Flashing, 16 ½" Base Diameter	81827	012181-818275	1.529	5	12
RETRO						
81828	¾" – 2 ¾" EPDM Roof Flashing, 6 ¼" Base Diameter	81828	012181-818282	0.222	10	4
81829	2" – 7 ¼" EPDM Roof Flashing, 10 ¾" Base Diameter	81829	012181-818299	0.640	5	5.3

MULTI-SIZE RAIN COLLARS



- Use on new installations to prevent leaks from vent pipe movement
- Slides over any brand of flashing for instant repair
- Eliminates the need for mastic or caulk
- Fully tested for ultraviolet, ozone and weather resistance
- Multi-Size design for a range of pipe dimensions and pitch variations
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81720	3 N 1" Collar for 1 ¼", 1 ½", 2" or 3" Vent Pipe	RC31	012181-817209	0.650	20	5
81722	Collar for 3" or 4" Vent Pipe	RC34	012181-817223	0.650	20	5

STANDARD SIZE RAIN COLLARS



- Use on new installations to prevent leaks from vent pipe movement
- Slides over any brand of flashing for instant repair
- Eliminates the need for mastic or caulk
- Fully tested for ultraviolet, ozone and weather resistance
- Individual size and multi-size models available
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81725	Collar for 1 ¼" or 1 ½" Vent Pipe	RC1	012181-817254	1.080	100	15
81730	Collar for 2" Vent Pipe	RC2	012181-817308	1.080	100	15
81735	Collar for 3" Vent Pipe	RC3	012181-817353	1.660	75	16
81740	Collar for 4" Vent Pipe	RC4	012181-817407	1.660	75	16
81745	Collar for ½", ¾", 1" Vent Pipe/25 bag	RC5	012181-817452	1.080	100	16

LOW-PROFILE RAIN COLLARS




- Low-profile size
- For all metal style roof flashings
- Designed to fit all metal coned roof jacks/flashings 1" - 4"
- Manufactured using a special EPDM material with UV inhibitor
- Limited Lifetime Warranty for the life of the current roof system
- Requires no mastic, caulking or taping for a total waterproof seal

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81739	Low Profile Collar for 1" Vent Pipe (25 bag)	LPC1	012181-817391	0.356	100	10
81741	Low Profile Collar for 1 ½" Vent Pipe (25 bag)	LPC15	012181-817414	0.356	100	9
81742	Low Profile Collar for 2" Vent Pipe (25 bag)	LPC2	012181-817421	0.356	100	11
81743	Low Profile Collar for 3" Vent Pipe (25 bag)	LPC3	012181-817438	0.868	100	14
81744	Low Profile Collar for 4" Vent Pipe (25 bag)	LPC4	012181-817445	1.040	100	18

SPECIALTY ROOFING PRODUCTS

SOLAR ROOFING PRODUCTS

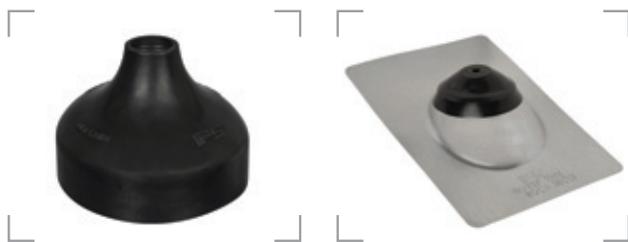

- Commercial & residential: water-tight seal for solar mounting system
- RCS1 Solar Collar is new and improved with a tapered neck and internal ribs for a water-tight seal
- Requires no mastic, caulking or taping – mess free
- Limited Lifetime Warranty for the life of the current roof system

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81950 NEW	Solar Collar for 7/8" to 1" Mounting Legs or Vent Pipe (25/Bag)	RCS1	012181-819500	1.040	100	14

FLASHINGS

81870	8 3/4" x 12 1/2" Base for 1/2", 3/4" or 1" Tubing	GB5	012181-818701	1.270	20	26
81879	18" x 18" Base for 1/2", 3/4" or 1" Tubing	GB518	012181-818794	2.590	15	34
81916	8 3/4" x 12 1/2" Base for 1/2", 3/4" or 1" Tubing	AB5	012181-819166	1.180	20	20
81937	18" x 18" Base for 1/2", 3/4" or 1" Tubing	AB518	021181-819371	2.560	15	16

ELECTRICAL MAST ROOF FLASHING



- Simplifies replacement of deteriorating flashings around electrical masts on shingle roofing
- Split-boot design
- Constructed of durable EPDM rubber
- Flashing base is reinforced with strong, rigid galvanized mesh
- 20-year warranty
- Manufactured in an ISO9001 registered factory

PRODUCT	FLASHING	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
81746	Electrical Mast RetroFit Roof Flashing, 0 to 3 3/8"	EFB1	012181-817469	15.365	15	17

APE-2000 ONE-WAY AIR PRESSURE EQUALIZER



Recommended for all types of roofing systems.

NOTE: Available with or without one-way insert. Also available with removable caps (please specify).

DIMENSIONS:

Height: 11.25"

Base Diameter: 11.00"

Stack Diameter: 6.00"

Cap Height: 4.25"

- .063 gauge aluminum
- "One-way air pressure equalizer" vent system
- Constructed of heavy gauge aluminum
- Fully insulated to eliminate condensation
- Engineered to withstand extended exposure to the elements without deterioration
- Will reduce the risk of ballooning, blow-offs, graver spreading, deterioration of roof insulation and deck seam separation
- 20-year warranty

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
99100	APE 2000 W/Tite-Top & Insulator, One Way	APE2000WTT	012181-991008	3.063	4	10
99101	APE 2000 W/Tite-Top No Insulator, Two Way	APE2000WOTT	012181-991015	3.063	4	10
99102	APE 2000 W/Removeable Top & Insulator, One Way	APE2000WRT	012181-991022	3.063	4	10
99103	APE 2000 W/Removeable Top, No Insulator, Two Way	APE2000WORT	012181-991039	3.063	4	10

BALLARD JL-10 ONE-WAY VENT



Recommended for all types of roofing systems. Install one vent per 900 sq. ft. of roof area.

DIMENSIONS:

Height: 9.75"

Base Diameter: 11.25"

Stack Diameter: 4.00"

Cap Height: 1.50"

- .063 gauge aluminum
- "One-way" vent system
- Constructed of heavy gauge aluminum, and fully insulated to eliminate condensation
- One piece spun aluminum construction eliminates the possibility of split seams and blown off caps
- Layer of one-way fabric allows moisture and air to escape, but not to enter the roofing system
- Unlike other vents on the market, there are no moving parts to wear out or clog due to insects or debris
- 20-year warranty

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
99104	Ballard JL-10 W/Tite-Top & Insulator, One Way	JL10	012181-991046	3.063	10	11

JIMCO SJL-3 ECONOMY VENT



Recommended for all types of roofing systems. Install one vent per 900 sq. ft. of roof area.

NOTE: Available with or without one-way EPS insert (please specify)

DIMENSIONS:

Height: 8.50"

Base Diameter: 8.00"

Stack Diameter: 3.00"

Cap Height: 2.50"

- .063 gauge aluminum
- "Economy one-way" vent system
- Constructed of heavy gauge aluminum
- Fully insulated to eliminate condensation
- Layer of one-way fabric that allows moisture and air pressure to escape, but not enter the roofing system
- Factory secured Tite Top design omits any possibility of backwash and cannot become detached from the main stack
- 20-year warranty

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
99105	SJL-3 W/Tite-Top & Insulator, One-Way	SJL3W	012181-991053	3.063	20	16
99106	SJL-3 W/Tite-Top & No Insulator, Two-Way	SJL3WO	012181-991060	3.063	20	16

JIMCO LT-6 ONE-WAY AIR PRESSURE EQUALIZER



Recommended for all types of roofing systems. Used also as a mobile home and trailer fan replacement vent.

DIMENSIONS:

Height: 6.50"

Base Diameter: 10.25"

Stack Diameter: 6.00"

Cap Height: 4.25"

- .063 gauge aluminum
- Constructed of heavy spun aluminum
- Designed to withstand extended pressure and air moisture trapped within the roofing system, for the purpose of allowing pressure (air moisture) to escape
- 20-year warranty

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
99107	LT-6 W/Tite Top & Insulator, One Way	LT6WTT	012181-991077	3.063	8	14
99108	LT-6 W/Tite Top, No Insulator, Two Way	LT6WOTT	012181-991084	3.063	8	14
99109	LT-6 W/Removable Top & Insulator, One Way	LT6WRT	012181-991091	3.063	8	14
99110	LT-6 W/Removable Top, No Insulator, Two Way	LT6WORT	012181-991107	3.063	8	14

JIMCO BREATHER VENT



Recommended for all types of roofing systems. Install one vent per 1000 sq. ft. of roof area

DIMENSIONS:

Height: 9.50"
 Base Diameter: 11.00"
 Stack Diameter: 4.25"
 Cap Height: 2.50"

- .063 gauge aluminum
- Constructed of a heavy gauge spun aluminum
- Designed to withstand prolonged exposure to the toughest elements without deterioration
- Cap has been engineered to eliminate any possibility of backwash
- Cannot become detached from the main stack, protecting it from the possibility of exposing breather holes to the elements
- 20-year warranty

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
99111	Jimco Breather Vent, Two-Way	JIMCO	012181-991114	3.063	10	11

JIMCO VJ-2 ONE PIECE VENT



Recommended for all types of roofing systems. Install one vent per 1100 sq. ft. of roof area.

DIMENSIONS:

Height: 5.50"
 Base Diameter: 10.25"
 Stack Diameter: 6.00"
 Cap Height: 1.20"

- .063 gauge aluminum
- Constructed of one piece heavy gauge spun aluminum
- Designed and fabricated to withstand extended exposure to the toughest elements without deterioration
- Low profile vent versatile for application on mobile homes, house trailers, etc.
- Large stack capacity able to handle a great amount of pressure from built-up or single ply roofs
- 20-year warranty

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
99115	VJ-2, Two-Way	VJ2	012181-991152	3.063	10	10

COMMERCIAL ROOFING PRODUCTS

JIMCO CJ-30 VENT



Recommended for all types of roofing systems. Install one vent per 600 sq. ft. of roof area.

NOTE: Also available with removable cap (please specify).

DIMENSIONS:

Height: 5.50"
Base Diameter: 10.25"
Stack Diameter: 6.00"
Cap Height: 1.20"

- .063 gauge aluminum
- Constructed of heavy gauge spun aluminum
- Designed to withstand extended exposure to the toughest elements without deterioration
- Cap has been engineered to eliminate any possibility of backwash
- Cannot become detached from the main stack, protecting from the possibility of exposing the breather holes
- 20-year warranty

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
99112	CJ-30 W/Removable Top, Two-Way	CJ30RT	012181-991121	3.063	20	13
99113	CJ-30 W/Tite-Top, Two-Way	CJ30TT	012181-991138	3.063	20	13

JIMCO HT-20 LOW PROFILE VENT



Recommended for all types of roofing systems. Install one vent per 200 sq. ft. of roof area.

DIMENSIONS:

Height: 5.50"
Base Diameter: 6.00"
Stack Diameter: 3.00"
Cap Height: 2.50"

- .063 gauge aluminum
- Low profile vent, mainly used in new construction of mobile homes, house trailers and also in the re-roofing industry
- Manufactured of a heavy gauge spun aluminum
- Cap design will not allow backwash
- 20-year warranty

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
99099	HT-20 With Tite Top, Two-Way	HT20TT	012181-990995	3.063	50	21
99114	HT-20 With Removable Top, Two-Way	HT20	012181-991145	3.063	50	21

RETROFIT INSERT ROOF DRAINS



DIMENSIONS:
 Flange: 16 1/2"
 Strainer Diameter: 7 1/2"
 Overall Length of Drain Outlet: 12"

- RetroFit drains with expandable anti-back-up seal(s)
- Constructed of a heavy gauge (.081) Spun Aluminum
- Bolt-in-place strainer dome

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
86111	Drain Pipe Size: 3" Outlet Outside Diameter: 2.75" Outlet Length: .727"	86111	012181-861110	3.091	6	30
86112	Drain Pipe Size: 4" Outlet Outside Diameter: 3.75" Outlet Length: .727"	86112	012181-861127	3.091	6	30
86113	Drain Pipe Size: 6" Outlet Outside Diameter: 5.75" Outlet Length: .727"	86113	012181-861134	3.091	6	30

ROOF DRAIN KIT



- Heavy duty plastic body
- 3" and 4" pipe sizes
- Clamping ring/gravel guard standard on all drains
- Two-piece underdeck clamp kits
- Accepts Schedule 40 pipe
- Available with Cast Iron Domes

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
86096	3" PVC Roof Drain W/Cast Iron Dome	4863K	012181-860960	0.727	1	6
86106	4" PVC Roof Drain W/Cast Iron Dome	4864K	012181-861066	0.727	1	7

Kits Include: Drain, underdeck clamp with hardware, expansion coupling, 4" section of PVC pipe and installation guide

COMMERCIAL ROOFING PRODUCTS

COMMERCIAL ROOF DRAINS & ACCESSORIES



PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
86115	3" PVC Roof Drain W/Plastic Dome	4865	012181-861158	0.727	1	4
86120	3" ABS Roof Drain W/Plastic Dome	5865	012181-861202	0.727	1	3
86095	3" PVC Roof Drain W/Cast Iron Dome	4863	012181-860953	0.727	1	8
86100	3" ABS Plastic Roof Drain W/Cast Iron Dome	5863	012181-861004	0.727	1	8
86121	4" PVC Roof Drain W/Plastic Dome	4866	012181-861219	0.727	1	4
86122	4" ABS Roof Drain W/Plastic Dome	5866	012181-861226	0.727	1	4
86105	4" PVC Roof Drain W/Cast Iron Dome	4864	012181-861059	0.727	1	8
86110	4" ABS Plastic Roof Drain W/Cast Iron Dome	5864	012181-861103	0.727	1	8
86125	Underdeck Clamping Collar W/ Hardware, 3" or 4" Roof Drain	5555	012181-861257	0.521	1	1
89522	Plastic Dome	89522	012181-895221	0.506	5	5
89527	Cast Iron Dome	89527	012181-895276	0.506	5	10
87580	3" Rubber Expansion Coupling	87580	012181-875803	0.521	20	13
87585	4" Rubber Expansion Coupling	87585	012181-857858	0.521	20	5

CAST IRON ROOF DRAIN



- 6 1/2" dome
- Available with bottom or side outlet

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
60213	3" No-hub Bottom Outlet	ABA573	767580-020773	0.912	1	16
60214	4" No-hub Bottom Outlet	ABA574	767580-020780	0.912	1	17
60215	2" No-hub Side Outlet	ABA582	767580-020797	0.574	1	16
60216	3" No-hub Side Outlet	ABA583	767580-020803	0.637	1	17

CAST IRON ROOF DRAIN



- Overflow combo
- 8 ¾" CD
- 6 ½" dome

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
60219	2" No-hub Outlet	ABA602	767580-020858	0.912	1	31
60220	3" No-hub Outlet	ABA603	767580-020865	0.912	1	31
60222	4" No-hub Side Outlet	ABA604	767580-020872	0.912	1	31
60218	6 ½" Dome with Ring & Hardware	ABA586	767580-020810	0.196	1	31

DURO•FLEX PROFESSIONAL KNEE PADS & HAND CLEANER



KNEE PADS

- Durable, waterproof shells with unique flexible accordion-fold tops that conform to the knee's position.
- Closed cell foam inner linings cushion knees from extreme shock and pressure.
- Double gum rubber straps adjust quickly for a non-binding exact fit.

HAND CLEANER

- Advanced hand cleaner in disposable wipe format for removing residual solvent cements (PVC, CPVC, ABS), primers and sealants, dirt, oil, grease and much more

PRODUCT	DESCRIPTION	MODEL	UPC	CUBIC FT./CASE	UNITS/CASE	LBS/CASE
88504	Non-Skid Sure Grip Knee Pads	KP1	012181-885048	1.660	12 pr	17
88505	Rigid Chem/Resistant Knee Pads	KP2	012181-885055	1.999	12 pr	22
88506	Knee Pad Replacement Straps	KPRS	012181-885062	3.099	12 sets	3
89142	Knee Pad Replacement Buttons	KPB	012181-891421	NA	12 sets	1
93500	Knee Pad Liner	KPRL	012181-935002	NA	12 pr	1
HAND CLEANER						
12762	Hand Cleaner Wipes-72 Pack	002110000	012181-127629	0.010	6	14



LIMITED LIFETIME WARRANTY

Roof Flashings & Rain Collars

IPS Corporation ("IPS Corp.") warrants to all original purchasers that IPS Corp. products shall be of good quality and free from defects in material and workmanship. Roof Flashings and Rain Collars are covered under this warranty for the life of the current roof system on which they are installed. If any IPS Corp. product becomes defective, or fails to conform to this written limited warranty under normal use, and if the original purchaser complies with the terms of this limited warranty, then IPS Corp. will, without charge, replace the nonconforming product.

This limited warranty shall extend to all products manufactured and sold by IPS Corp. However, this limited warranty shall not extend to, nor shall IPS Corp. be responsible for, damages or loss resulting from accident, misuse, negligent use, improper application, or incorporation of IPS Corp. products into other products. In addition, any repackaging of IPS Corp. products also shall void the limited warranty provided herein.

IPSROOFINGPRODUCTS.COM

IPS Roofing Products

500 Distribution Parkway
Collierville, Tennessee 38017
USA

tncustserv@ipscorp.com

Tel (800) 888-8312

Fax (901) 853-5008